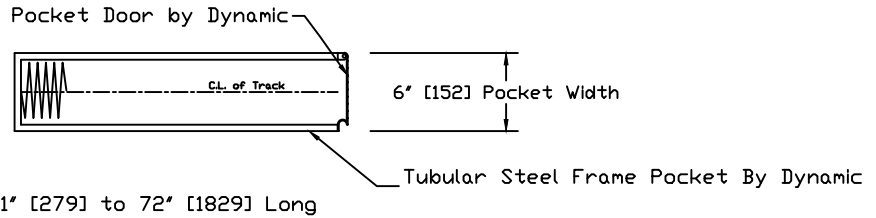# Pocket Clearances Required - Straight Pockets
Plan Views
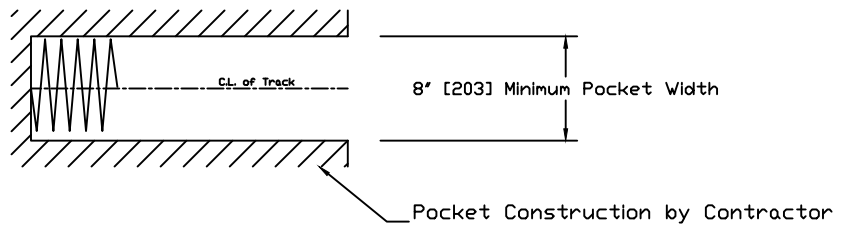
EZ Closure 4" [102]
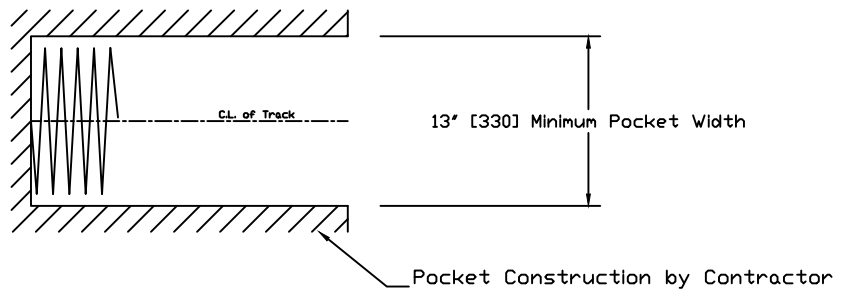
Pocket Door by Dynamic

C.L. of Track

6" [152] Pocket Width

Tubular Steel Frame Pocket By Dynamic

Available in 11" [279] to 72" [1829] Long

Slim Line 4" [102]

C.L. of Track

5" [127] Minimum Pocket Width

Pocket Construction by Contractor

Standard 7" [178]

C.L. of Track

8" [203] Minimum Pocket Width

Pocket Construction by Contractor

Wide Body 11" [279]

C.L. of Track

13" [330] Minimum Pocket Width

Pocket Construction by Contractor
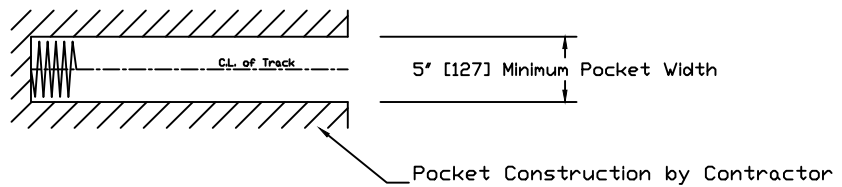
Pocket length is determined by stack dimension