

The PRO-GJ is designed for use on commercial sectional doors with high or vertical lift track and small rolling doors, shutters and grilles that require no more than 15 cycles per hour.

Date: _____
 Page: ____ of _____
 Drawing No. _____
 Project: _____
 Architect/Engineer: _____
 Contractor: _____
 Customer: _____






FULL LOAD AMP RATING CHART

Voltage	1/2HP
115 V - 1 ϕ - 60 Hz	5.5
230 V - 1 ϕ - 60 Hz	3.0
230 V - 1 ϕ - 50 Hz	3.2
208/230 V - 3 ϕ - 60 Hz	2.1
380 V - 3 ϕ - 50 Hz	2.0
460 V - 3 ϕ - 60 Hz	1.1
575 V - 3 ϕ - 60 Hz	1.0

Number of Operators: _____
 Horsepower: 1/2 HP
 Volts: _____
 Phase: _____
 Hertz: _____
 Type of Door: _____
 Door Width/Height: __ W x __ H
 Operator Nema Rating: _____
 OPEN/CLOSE/STOP Control Stations: __

Control wiring option: _____


- A** Relay Logic w/ interface module (monitored reversing device supplied)
- B** Relay logic (*not available in US or other areas where UL 325 2010 is mandated*)

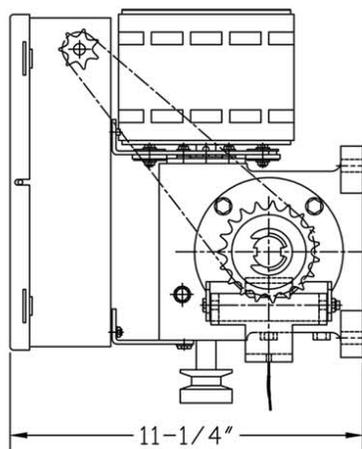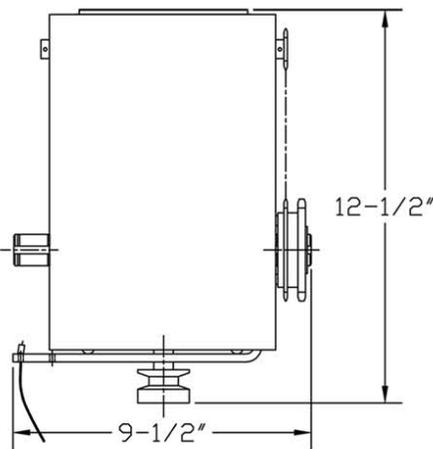

A, B, C or D

Handing

LH RH



Wall Mount or Front of Coil

Additional Equipment or Options

For technical support, please call 1-877-888-1116